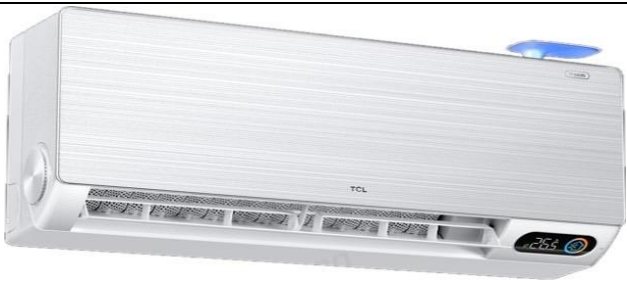


Specification for FreshIN G2

				
Model Name			9K	12K
			TAC-09CSD2	TAC-12CSD2
Type			cooling only	cooling only
Power supply	Ph-V-Hz		230V~60Hz, 1Ph	230V~60Hz, 1Ph
Control type			remote	remote
Rated cooling capacity	kJ/h		10000(1000~13000)	12200(2850~14500)
Rated cooling capacity (Energy label)	W		2,930	3,520
SEER		W/W	21.97	20.85
EGAT Label			5★	5★
Moisture removal	Liters/h		0.8	1.2
Indoor noise level at cooling	Turbo	dB(A)	42	42
	High	dB(A)	40	40
	Med.	dB(A)	36	36
	Low	dB(A)	31	31
	Mute	dB(A)	22	22
Outdoor noise level	dB(A)		52	52
Electrical System				
Voltage Range		V	165~265	165~265
Rated current	Cooling	A	3.2(1.2~5.8)	4.7(1.2~8.5)
Rated input	Cooling	W	660(220~1100)	1050(220~1900)
Max current		A	5.8	8.5
Max input		W	1100	1900
Refrigerant/Charge		Gram	R32/480g	R32/480g
Compressor	Type		Rotary	Rotary
	Model		KSN98D31UEZW31	KSN98D31UEZW31
	MFG		GMCC	GMCC
Fan System				
Indoor air circulation	m ³ /h		550	550
Indoor fan type			Cross Flow	Cross Flow
Indoor fan motor type			DC	DC
Outdoor fan type			Propeller fan	Propeller fan
Outdoor fan motor type			DC	DC
Connecting System				
Connecting Pipe	Gas	Inches	3/8"	3/8"
	Liquid	Inches	1/4"	1/4"
Connecting Wiring	Size x Core number		4×1.0mm ²	4×1.0mm ²
Others				
Suitable area	m ²		9~16	15~23
Net dimensions (W x H x D)	Indoor	mm	898×313×210	898×313×210
	Outdoor	mm	787×290×498	787×290×498
Net weight	Indoor	kg	11	11
	Outdoor	kg	20.5	20.5
Packing dimensions (W x H x D)	Indoor	mm	1008×389×333	1008×389×333
	Outdoor	mm	838×338×540	838×338×540
Gross weight	Indoor	kg	14	14
	Outdoor (Without pipe)	kg	24	24
Barcode Indoor			6931084744655	6931084744679
Barcode Outdoor			6931084744662	6931084744686